

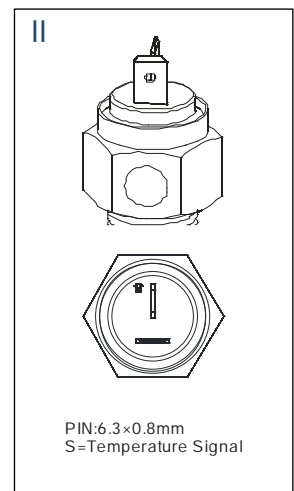


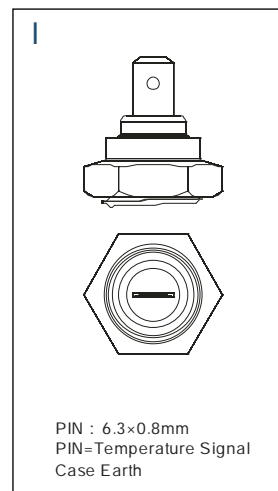

A comprehensive range of temperature senders for all automotive and marine requirements. Available in both grounded and ungrounded (isolated ground) versions in a vast array of thread sizes.

Model	Thread	Form
412524	1/8" NPTF	Grounded
STP-2G	1/4" NPTF	Ungrounded
STP-2B	3/8" NPTF	Ungrounded
STP-2F	1/2" NPTF	Ungrounded
STP-2D	5/8" UNF	Ungrounded
STP-2E	M14	Ungrounded
STP-2A	M16	Ungrounded
STP-2C	M18	Ungrounded

Operating voltage	6 - 24V;
Range	40 - 120°C;
Resistance	260 - 23 Ohms;
Temperature response time	Minimum 3 minutes after power supply electrified;
Protection	IP67;
Main body material	Brass.

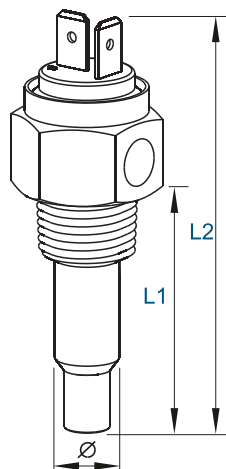

Proudly distributed by:



16 Parkinson Lane
O'Connor WA 6163
Australia

Phone +61 8 9331 3100
Fax +61 8 9331 5150
Email mail@amelec.com.au
Web www.amelec.com.au