

Dolphin premium

12V 60A Charger




Plug and Play Battery Charger

Protection:

- Output overload
- Excessive internal temperature
- Charging voltage too high
- Reverse battery polarity (fuse)

Input Voltage	115V / 230V (+/- 15%) Automatic Switchover
Frequency	50Hz / 60Hz (+/-10%)
Cos	0.9 typ
Efficiency	80% typ
Max. Current 115V/230V	12A / 6A
Input Fuse (5x20mm)	T16A 250V
Outputs	3 isolated outputs
Charging curves	4 programs, position selected by dip switch NEW - one of which is LiFeSO4 with integrated BMS
Charging curve	IUUo + weekly automatic equalisation
Weekly equalisation	Automatic
Voltage share	+/-2%
Ripple	< 1% pp (BW < 20MHz)
Output Fuse (auto. mini)	3 x F25A 32V
Display	Tricolour LED
Night/Silent Mode	Manual switch
Operating Temperature	-10°C to +50°C
Operating Humidity	10% to 90% (without condensation)
Ventilation	Forced fan cooling
Security	EN60335-2-29 (2002)
Housing	Powder coated aluminium
Mounting	4 screws 4mm
Input terminals	40A 630V, 10mm ² max PHOENIX CONTACT PC6-16/4-G1F,16
Battery terminal	4 Poles 35mm ² , 125amp max clamp terminals
CAN BUS	Yes
Dimensions	284 x 240 x 115 mm
Weight	3 Kg

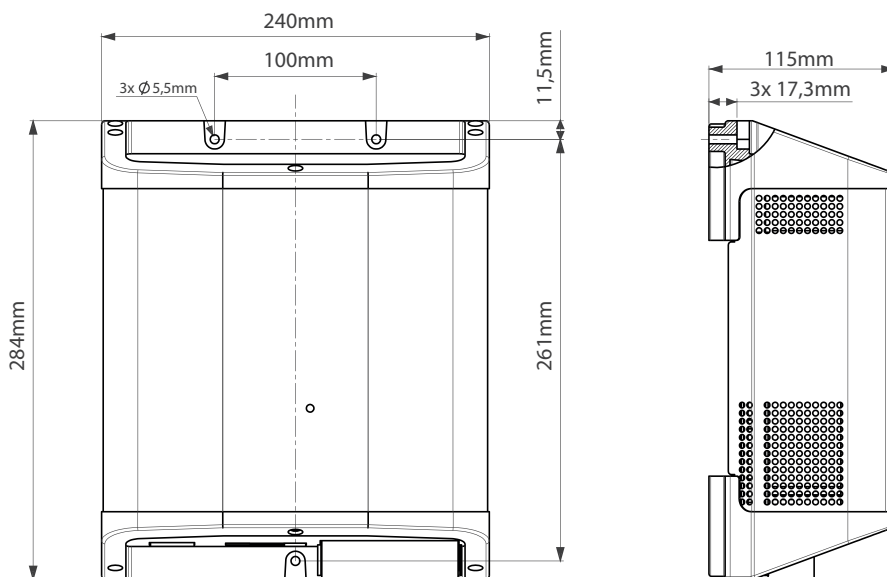

Part No. 399050 **Model** 12V 60A

Proudly distributed by:



16 Parkinson Lane
O'Connor WA 6163
Australia

Phone +61 8 9331 3100
Fax +61 8 9331 5150
Email mail@amelec.com.au
Web www.amelec.com.au