



Battery Master Switch Single Pole 150A

CODE NUMBER: 530102

GENERAL

Fixed handle with ergonomic grip is removable for installation. Tested to 200 hours salt spray resistance.

ELECTRICAL

Rated Voltage: 48VDC maximum
 Rated Current: 150/1000 Amps sustained/5 secs
 Configuration: Normally Open (N/O)

PHYSICAL

Termination: M10 copper studs
 Stud Torque: 9 ± 1.0 Nm
 Contacts: Copper
 Hardware: Brass nuts and washers
 Construction: Reinforced plastic body with zinc plated and epoxy coated die cast frame and thermoplastic handle.



Environmental: IP65
 Operating Temp: -40°C to $+85^{\circ}\text{C}$
 Dimensions: 80mmL x 80mmW x 97mmH
 Weight (nominal): 240 Grams

SPARE PARTS

Handle: Order no. 580011
 Cap: Order no. 580010




A robust device ideal for a multitude of heavy current switching applications in boat and yacht applications. Constructed from quality materials and sealed to protect from harsh environmental conditions.

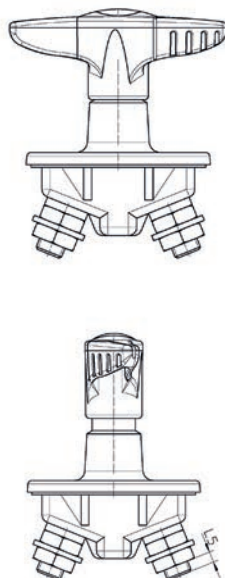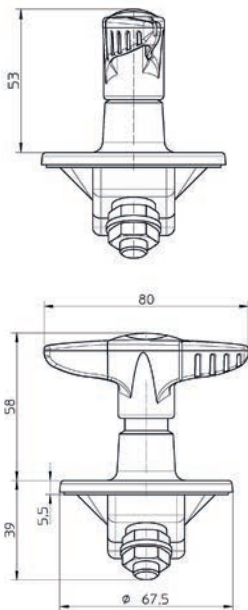


CLOSED

OPEN

Connection



Fixing



Proudly distributed by:



16 Parkinson Lane
 O'Connor WA 6163
 Australia

Phone +61 8 9331 3100
Fax +61 8 9331 5150
Email mail@amelec.com.au
Web www.amelec.com.au